


JDB 固体润滑轴承公制尺寸 Solid-Lubricant Bearing Standard Metric Sizes

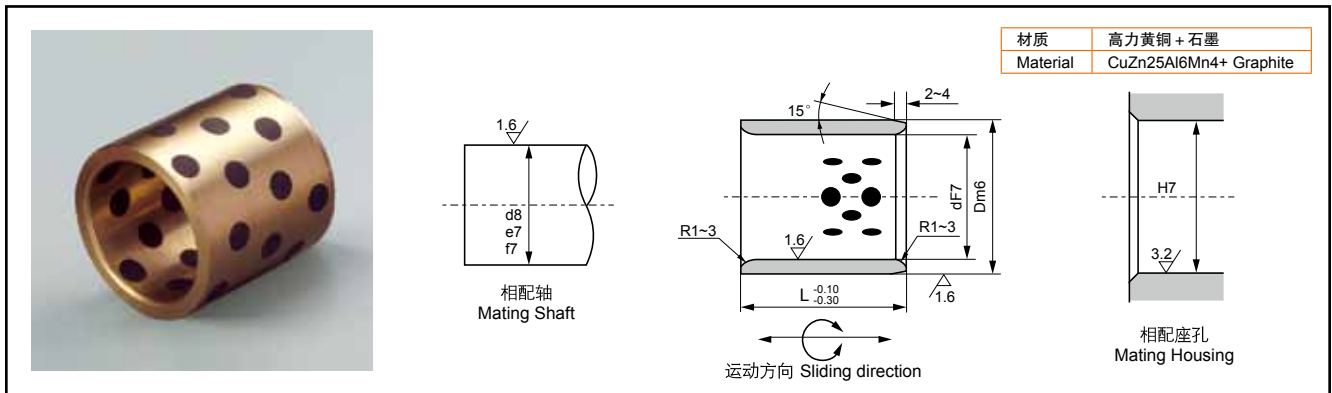


单位unit:mm

内径 dF7	8	10	12	13	14	15	16	18	20	22	25	30	35	40	45	50	50
	+0.028 +0.013				+0.034 +0.016						+0.041 +0.020				+0.050 +0.025		
外径 Dm6	12	14	18	19	20	21	22	24	28	32	33	38	45	50	55	60	62
		+0.018 +0.007				+0.021 +0.008						+0.025 +0.009				+0.030 +0.011	

内径 dF7	50	55	60	60	63	65	70	70	75	75	80	80	90	100	110	120	125	130	140	150	160
	+0.050 +0.025					+0.060 +0.030							+0.071 +0.036					+0.083 +0.043			
外径 Dm6	65	70	74	75	75	80	85	90	90	95	96	100	110	120	130	140	145	150	160	170	180
										+0.035 +0.013								+0.040 +0.015			

注：长度L按客户需求制作

JFB 铜基翻边镶嵌式固体润滑轴承 Cast Bronze Flanged Solid-lubricant inlaid bearing

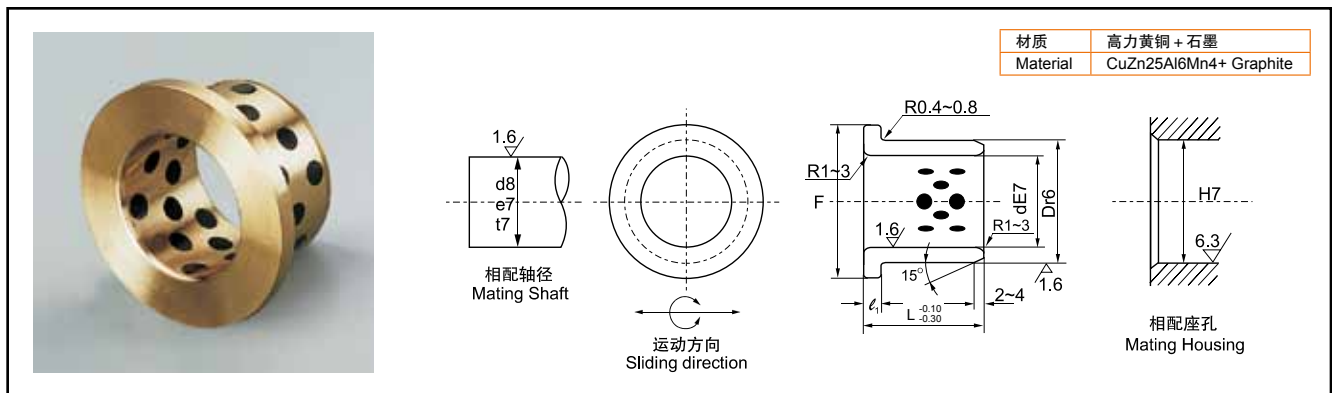

单位unit:mm

内径 d	10	12	13	14	15	16	20	25	30	31.5	35	40	45	50	55	60	63	70	75	80	90	100	120
外径 D	14	18	19	20	21	22	30	35	40	40	45	50	55	60	65	75	75	85	90	100	110	120	140
内径 IDE7	10	12	13	14	15	16	20	25	30	31.5	35	40	45	50	55	60	63	70	75	80	90	100	120
	+0.040 +0.025	+0.050 +0.032					+0.061 +0.040			+0.075 +0.050					+0.090 +0.060					+0.107 +0.072			
外径 ODr6	14	18	19	20	21	22	30	35	40	40	45	50	55	60	65	75	75	85	90	100	110	120	140
	+0.034 +0.023		+0.041 +0.028					+0.050 +0.034					+0.060 +0.041			+0.062 +0.043		+0.073 +0.051		+0.076 +0.054		+0.088 +0.063	
法兰尺寸 F	22	25	26	27	28	29	40	45	50	60	65	70	75	80	90	85	105	110	120	130	150	170	
ℓ_1 -0.10	2	3					5									7.5			10				

注：长度L按客户需求制作